



Regavent 250R Central Unit

Performance Curve

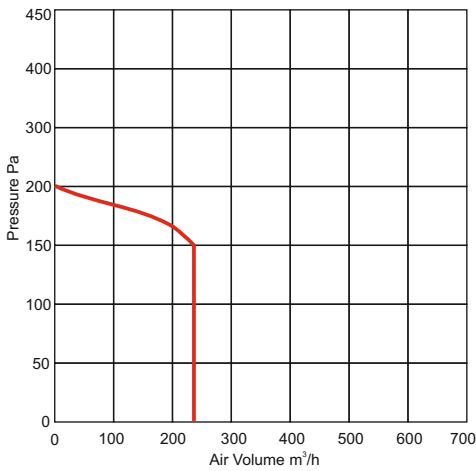

Features

- Capable of delivering up to 80 l/s of air volume. (Suitable for houses of up to 210m²)
- 125mm Duct connections.
- Low power consumption EC motors.
- Acoustically lined, complete with anti-vibration mounting bracket to provide virtually silent operation.
- Supplied with built in humidistat controller. Automatically boosts air flow to remove excess moisture from the atmosphere.
- Durable galvanised steel construction.
- Manufactured in the UK.
- Can be fitted with a summer bypass unit to provide automatic summer operation.
- Pollen filters available.

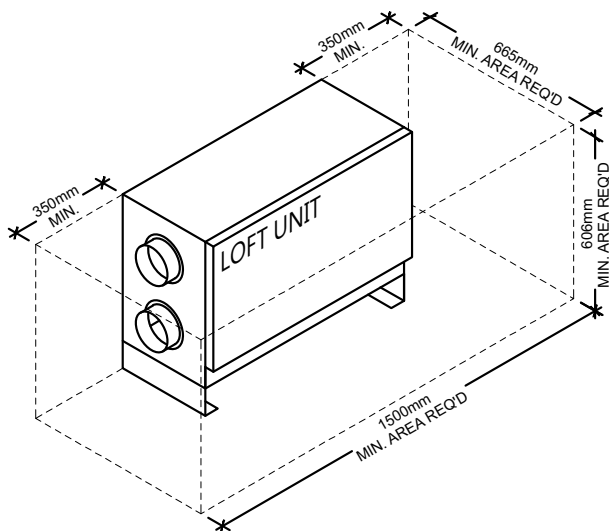


Technical Spec


Air Volume Max.	240m ³ /h
Air Volume Min.	50m ³ /h
Voltage	230/240v AC
Avg. Power Usage	80 watts
Avg. Current Draw	0.35 amp
Weight	30KG
Sound From 1m	35-40dB

Dimensions


- Loft: 511(h)x800(w)x365(d)mm
- Wall: 715(h)x600(w)x365(d)mm

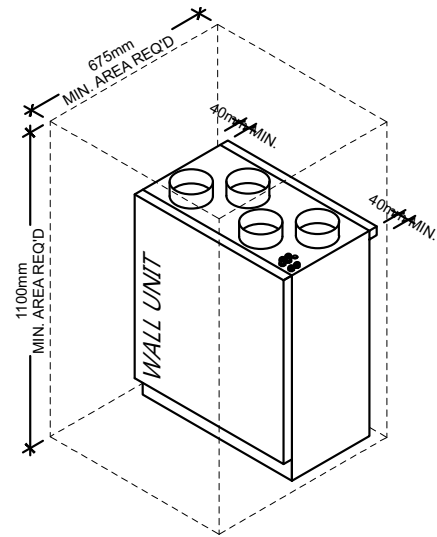


Loft Unit

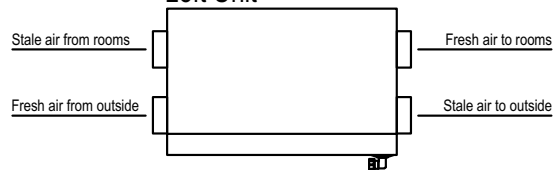

Wall Unit (LH)



Wall Unit (RH)



Unit Efficiency

250R	Kitchen + 1 additional wet room	Kitchen + 2 additional wet rooms	Kitchen + 3 additional wet rooms	Kitchen + 4 additional wet rooms	Kitchen + 5 additional wet rooms	Kitchen + 6 additional wet rooms	Kitchen + 7 additional wet rooms
Specific Fan power (w/l/s)	0.6	0.62	0.68	0.82	0.96	1.13	1.34
Efficiency	88	88	87	86	85	85	84

...for a fresher, healthier, home



Rega Ventilation Limited

21/22 Eldon Way, Biggleswade, Beds SG18 8NH
fax: 01767 600487 email: sales@rega-uk.com

Call us on **01767 600499** or visit
www.regavent.co.uk